



L-Band Hybrid Coupler


for nanosatellites applications & more

ABOUT

WiRan 90° Hybrid Couplers allow for easy and reliable splitting of an input RF signal equally between two output ports with a 90 degree phase shift. Can also work in reverse, combining 90 degree phase shifted signals.

FEATURES

- small dimensions, perfect for compact satellites
- excellent phase & amplitude balance
- low insertion loss & VSWR
- high isolation
- high power handling

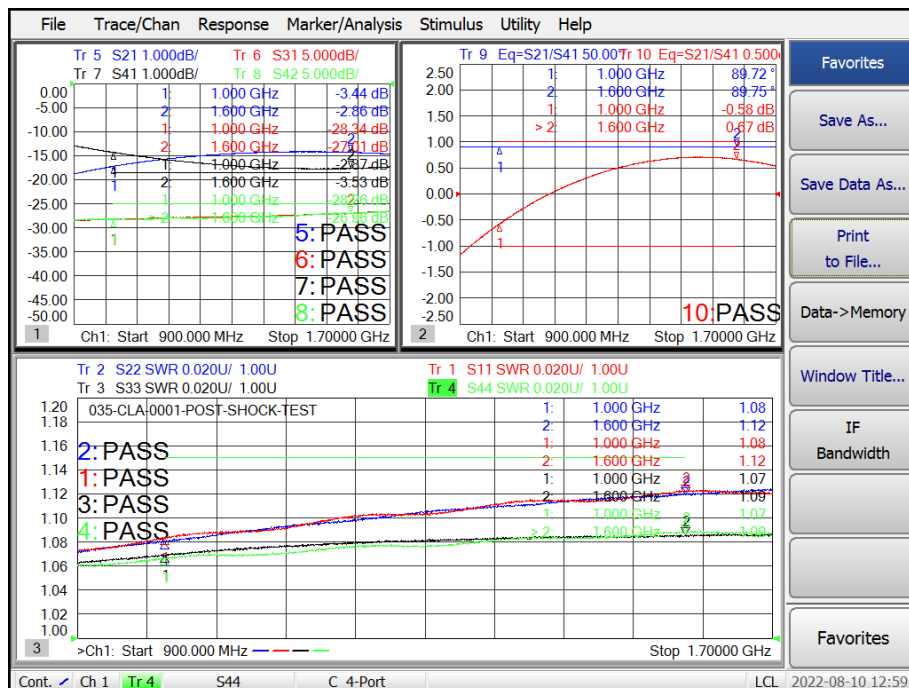

S parameters available on request

WiRan sp. z o.o.

Pomeranian Science and Technology Park, Al. Zwycięstwa 96/98

81-451 Gdynia, Poland

+48 58 663 10 10


wiran.pl, info@wiran.pl



L-Band Hybrid Coupler

for nanosatellites applications & more

Frequency Range	1.0 ~1.6GHz
Nominal Split	3.01±0.3dB
Insertion Loss	≤0.4dB (above nominal split)
Isolation	≥25dB (At +20°C) ≥23dB in operating temp. range
Amplitude Balance	≤±0.5dB
Phase Balance	≤±3°
Return Loss	≥20 dB
Power Handling	≤30 Watt
Impedance	50Ω
Port Connectors	SMA-Female
Operating Temperature	-75~+90°C
Weight	60 g

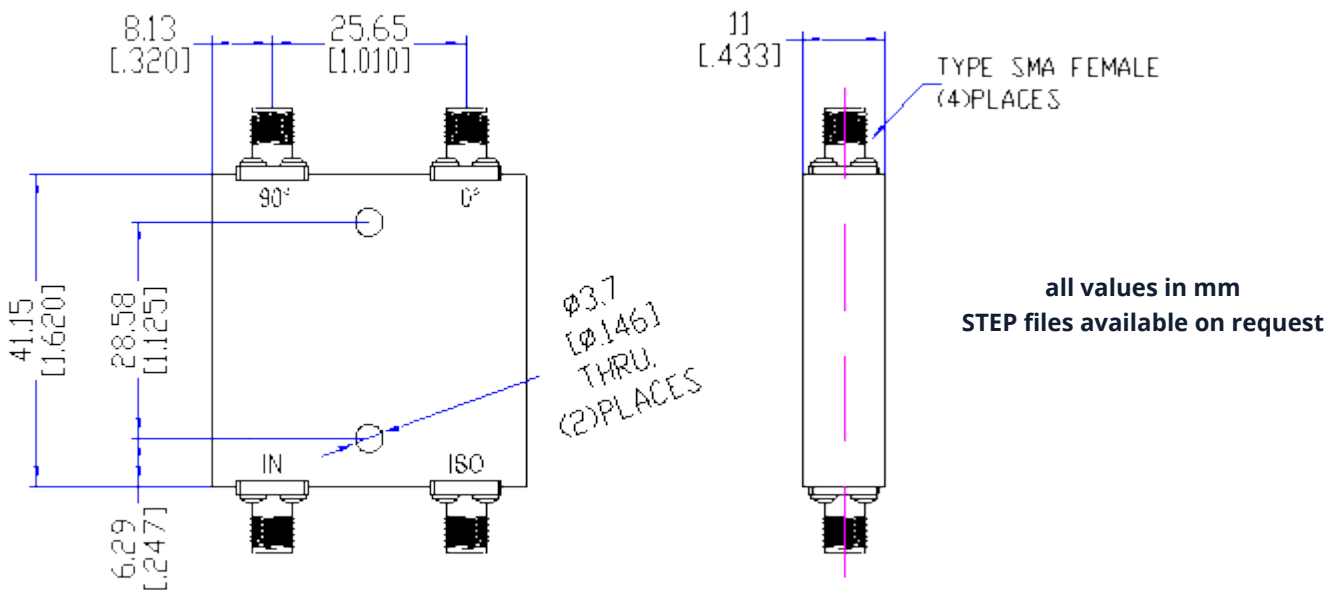

Ordering code	Description
CLA	L band hybrid coupler 1000-1600 MHz, CubeSat compatible